

# CREST e

KARTA TECHNICZNA

PREMIUM LINE

#### **KEY FEATURES**

- Ease of assembly
- No visible brakcet
- Perfect for any bathroom due to its flat design
- Original and aesthetic performance
- The dryer complies with the EN standard
- Guaranteed high quality



As standard supplied in white with the electric heater connected in position 01 [see connection diagram]

Туре:	ACRe - electric dryer				
Material:	Low carbon steel, unalloyed				
Construction:	Pipe profile 50 x 15 Collector 35 x 35				
Surface finish:	Standard color is white [01]				
ELECTRIC HEATER					
Power:	230 VAC, 50 Hz				
Housing protection degree:	IPx 4				
Heater connection	½"				

	STANDARD	)
Connection diagram	[E]	23 [15]
Connection codes		


2 - air vent ½" 3 - plug ½"

## FUNCTIONS OF THE ELECTRIC HEATER

- 1. The temperature of the heating medium is regulated by means of the "+" and "-" buttons. Heating levels: 30, 40, 50, 60°C.
- 2. Dryer function with maximum heating power with two operating modes:
  - Timer "2h back" after 2 hours return to the previous settings,
  - "2h off" timer the heater is turned off after 2 hours.
- 3. The controller can be rotated by an angle of 330o.
- 4. Intelligent work control microprocessor control.


- 5. Intelligent visualization of operating states: heating, setting, timer, failure colorful LED technology.
- 6. Protection against freezing of the refrigerant Antifreeze function.
- 7. Two-stage thermal protection:
  - The main controller does not allow the temperature to rise above 60 ° C,
  - The thermal fuse cuts off the power at the moment of uncontrolled rise

CRESTe ELEKTRYCZNY	He H [mm]	ight Hg [mm]	Width W [mm]	Depth D [mm]	Heater [W]	INDEKS	Version CODE
ACRe 80/50	890	820	500	90	400	1E11514327 <b>0101</b>	
ACRe 100/50	1100	1030	500	90	400	1E11514328 <b>0101</b>	
ACRe 140/50	1450	1380	500	90	500	1E11514329	90101

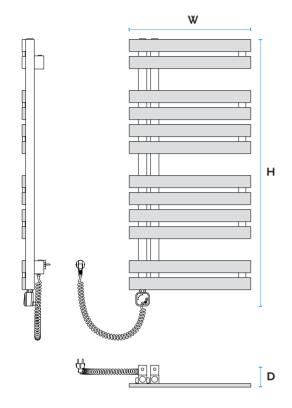



#### The heater construction


- 1. Heating element
- 2. Controller housing
- 3. Switch (on / off)
- 4. Downward temperature control
- 5. Temperature control "up"
- 6.LED indicator
- 7. Power cord

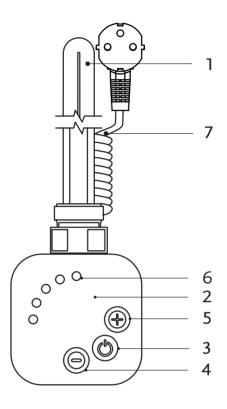


H - total height; Hg - radiator height; W - width; D - depth;









### GORGIEL GROUP Sp. zo.o. Sp.k.

Karpicko, 64-200 Wolsztyn ul. Poznańska 10

tel. +48 68 347 54 00 fax + 48 68 347 54 50 gorgiel@gorgiel.com.pl



gorgiel.pl