

**Gorgiel** ... in warm atmosphere



# AMUR

INFORMATION CARD



## KEY FEATURES

- Easy to mount
- No visible brackets
- Ideal for every bathroom
- Original and aesthetic finishing
- Radiator according to EN 442
- High quality guaranteed



Supplied as standard in white [01] colour with type 11 connection.  
Valves shown in the photo are optional and charged separately.


Type:	Amur- grzejnik łazienkowy
Material:	Low carbon steel
Construction:	Pipe profile 30 x 10 Collector profile 30 x 30
Work pressure:	Up to 0,8 MPa (8 bar)
Work temperature:	Up to 95°C
Standard equipment:	Plug ½", Air vent ½" Radiator bracket Z23
Standard finishing:	Standard white colour [01]
Connection:	Internal thread ½"

	STANDARD
Connection diagram	[C] 
Connection code	OPTION
	[M] 
	2 - plug ½" 3 - air vent ½" 4 - plug installed as standard possibility of installing an electric heater


# AMUR

AMUR	H [mm]	W [mm]	D [mm]	C [mm]	M [mm]	55/45/20°C [W]	75/65/20°C [W]	90/70/20°C [W]	INDEKS	[kg]	[dm <sup>3</sup> ]
AAM 95/38	950	380	65-75	350	50	162	305	383	10115144331101	5,76	2,34
AAM 120/38	1225	380	65-75	350	50	206	391	491	10115144341101	7,42	3,01
AAM 145/38	1445	380	65-75	350	50	243	462	581	10115144351101	8,93	3,61
AAM 75/53	730	530	65-75	500	50	166	313	392	10115143651101	5,65	2,16
AAM 95/53	950	530	65-75	500	50	213	403	506	10115143661101	7,24	2,78
AAM 120/53	1225	530	65-75	500	50	272	516	649	10115143671101	9,33	3,58
AAM 145/53	1445	530	65-75	500	50	321	610	768	10115143681101	11,26	4,30


[1] - connection type

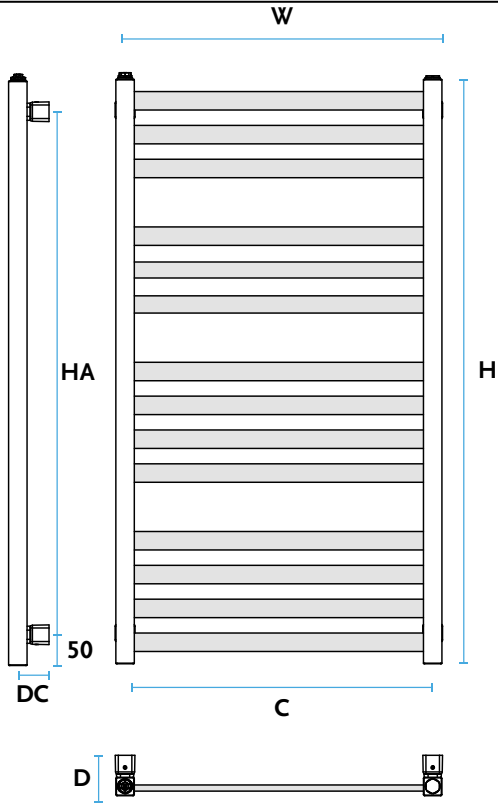

[2] - connection type

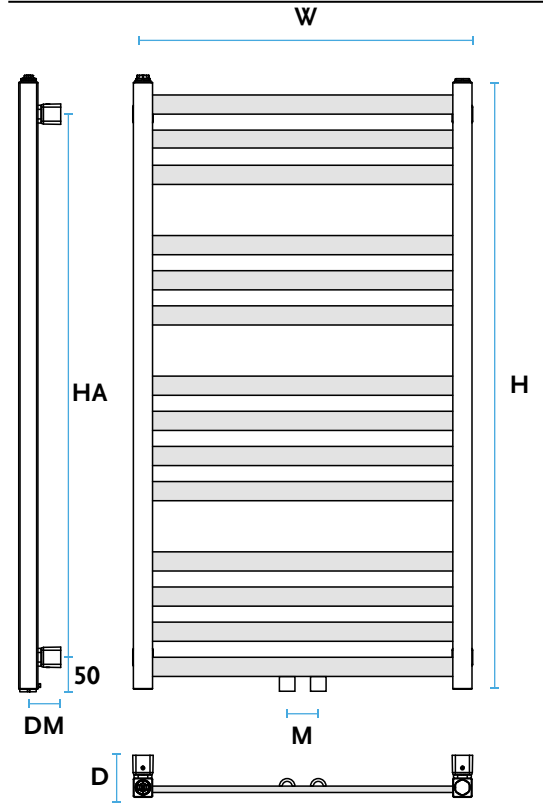

H - height; W - width; D - depth; C - installation connection spacing  
DC; DM = 50-60; HA = H - 100

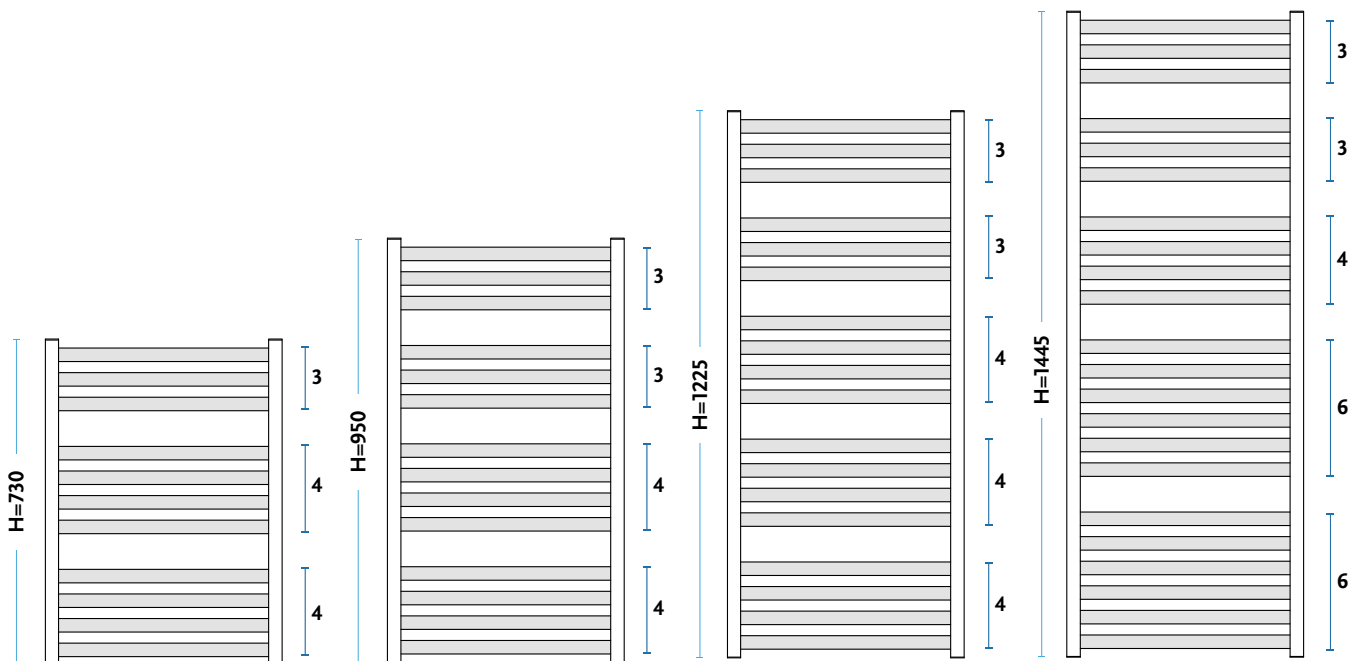




**GORGIEL GROUP Sp. zo.o. Sp.k.**

Karpicko, 64-200 Wolsztyn  
ul. Poznańska 10

tel. +48 68 347 54 00  
fax + 48 68 347 54 50  
gorgiel@gorgiel.com.pl



[gorgiel.pl](http://gorgiel.pl)