





ZBG 400


Buffer tank

TECHNICAL SHEET


		ZBG 400	
Indeks		B023000400	
Performance class		В	
Standstill losses	W	69	
Capacity	1	400	
Work pressure	bar (MPa)	3 (0,3)	
Work temperature	°C	6-95°C	
PUR insulation	mm	60	
Dimensions			
Α	mm	149	
В	mm	582	
С	mm	966	
D - DIAMETER	mm	720	
E	mm	1350	
F	mm	228	
G	mm	610	
Н	mm	1650	
I	mm	995	
J	mm	1378	


KEY FEATURES

- Free-standing tank
- PUR foam isolation
- Ensures high efficiency of the heating system,
- Especially for installations with more than one heat source.
- Eliminates the risk of wasting energy and ensures great convenience of using the heating system.
- The buffer tank makes the entire heating system work much more efficiently and effectively.
- The presence of buffer tanks makes the entire heating system work much more efficiently and effectively.

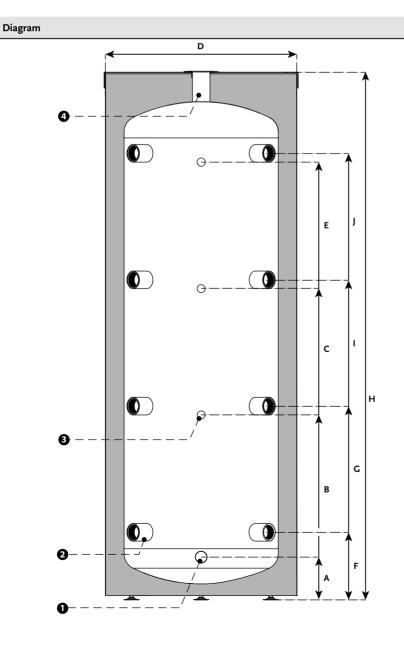

1	1"	Drain coupling
2	6/4"	Connection sleeve
3	1/2"	Temperature sensor sleeve
4	6/4"	Air vent sensor sleeve

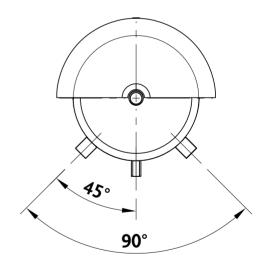



GORGIEL GROUP Sp. zo.o. Sp.k.

Karpicko, 64-200 Wolsztyn ul. Poznańska 10

tel. +48 68 347 54 00 fax + 48 68 347 54 50 gorgiel@gorgiel.com.pl