



RS-N | Steel manifold with 1/2" x 3/4" connectors

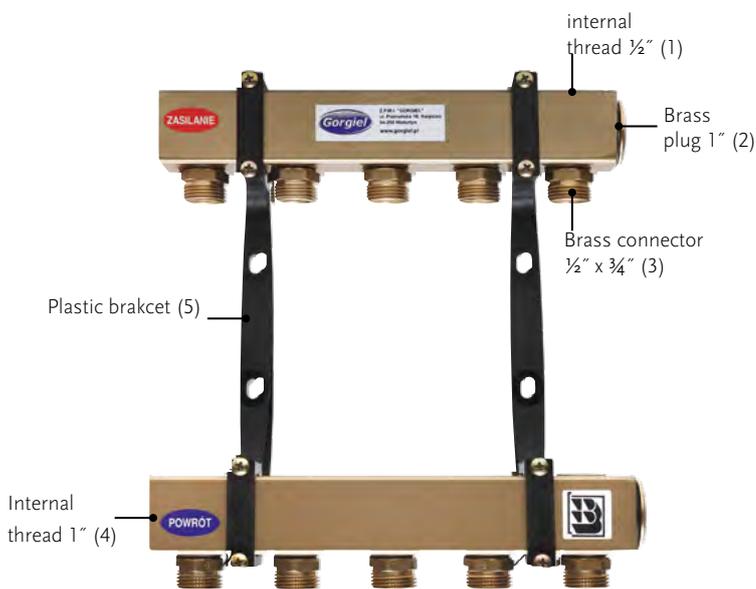

Material:	Steel
Construction:	Profile 40 x 40
Operating temperature:	Up to 90°C
Operating pressure:	Up to 0,6 MPa
Anti-corrosion protection:	Degreasing Passivation Powder painting
Warranty:	10 years for beam tightness. 2 years for equipment and O-rings
Recommended use:	Radiator heating in a closed system

1. Internal thread 1/2"
2. 1" Brass plug with O-ring seal
3. Brass connector 1/2" x 3/4"
4. Internal thread 1"
- for connecting the central heating installation
5. Plastic brakcets

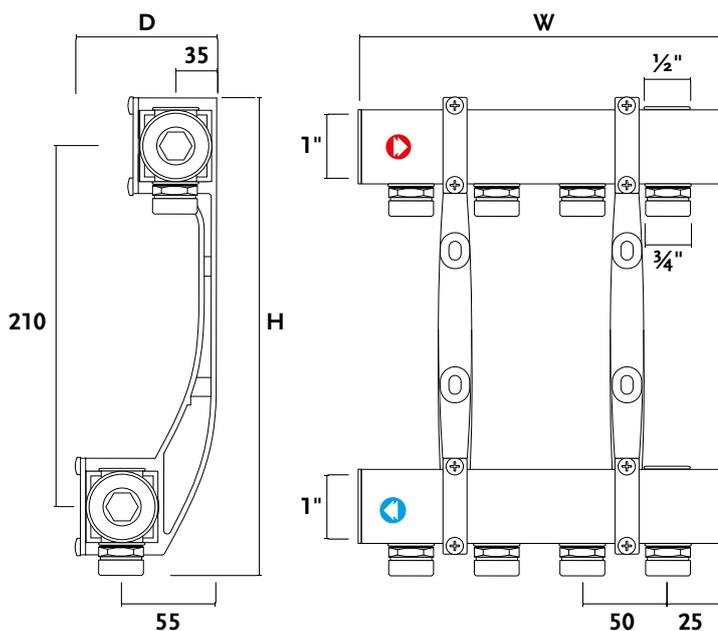

Type	Section no.	Width [W] mm	Height [H] mm	Depth [D] mm	Indeks	Weight [kg]
RS N 2	2	105	290	83	1041126210	1,23
RS N 3	3	155	290	83	1041126215	1,53
RS N 4	4	205	290	83	1041126220	1,84
RS N 5	5	255	290	83	1041126225	2,17
RS N 6	6	305	290	83	1041126230	2,55
RS N 7	7	355	290	83	1041126235	2,90
RS N 8	8	405	290	83	1041126240	3,24
RS N 9	9	455	290	83	1041126245	3,88
RS N 10	10	505	290	83	1041126250	4,29
RS N 11	11	555	290	83	1041126255	4,58
RS N 12	12	605	290	83	1041126260	4,93
RS N 13	13	655	290	83	1041126265	5,57
RS N 14	14	705	290	83	1041126270	5,89