


Gorgiel ... in warm atmosphere

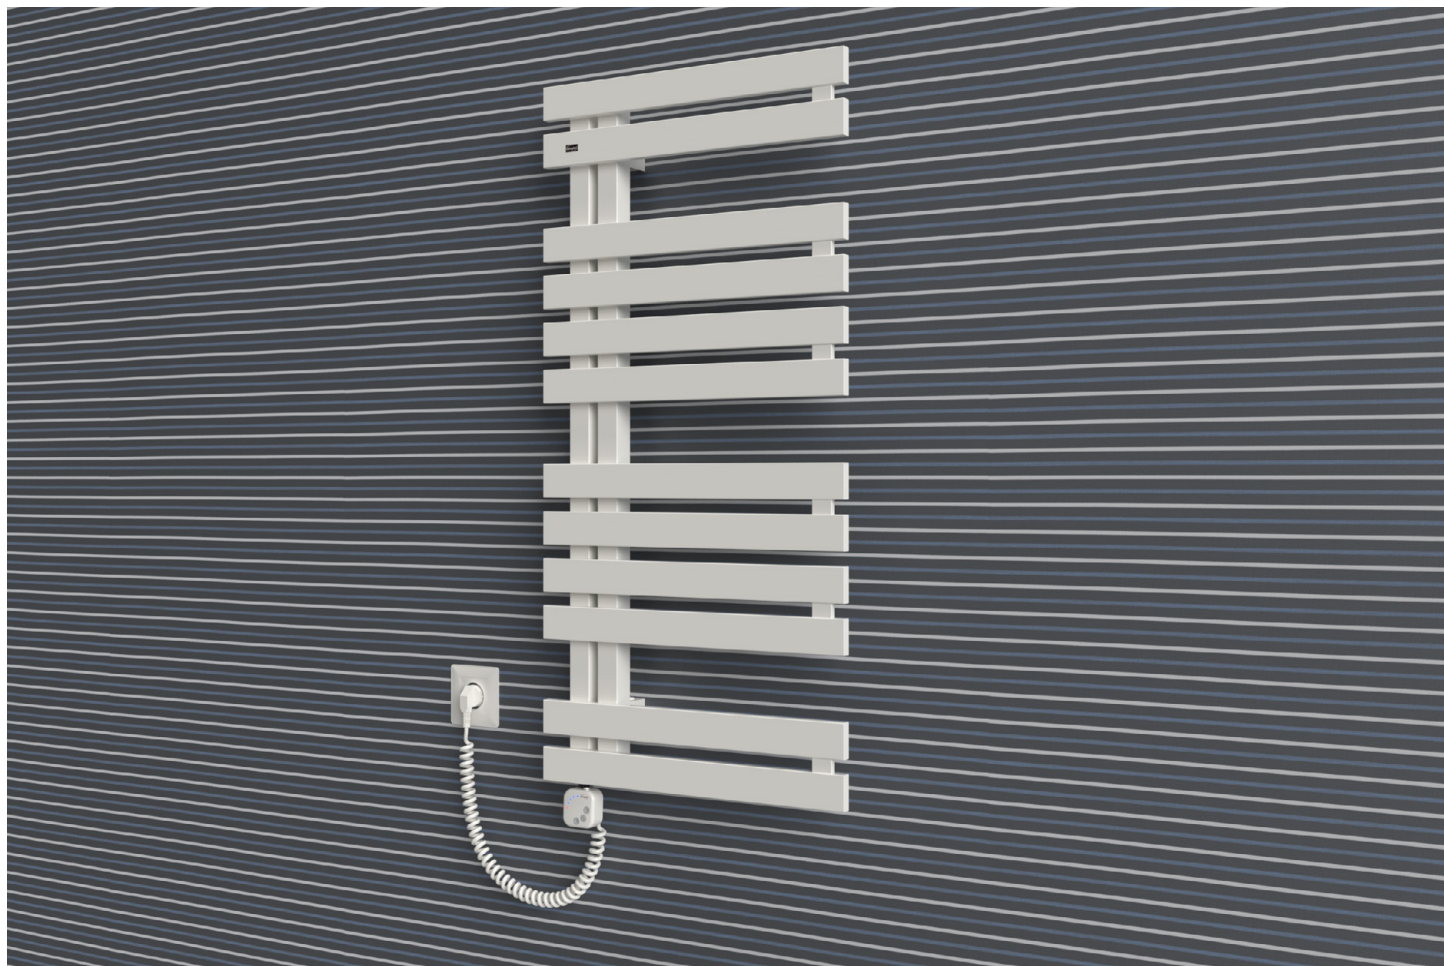

CREST e


ELEKTRYCZNY

KARTA TECHNICZNA

PREMIUM LINE

KEY FEATURES

- Ease of assembly
- No visible bracket
- Perfect for any bathroom due to its flat design
- Original and aesthetic performance
- The dryer complies with the EN standard
- Guaranteed high quality

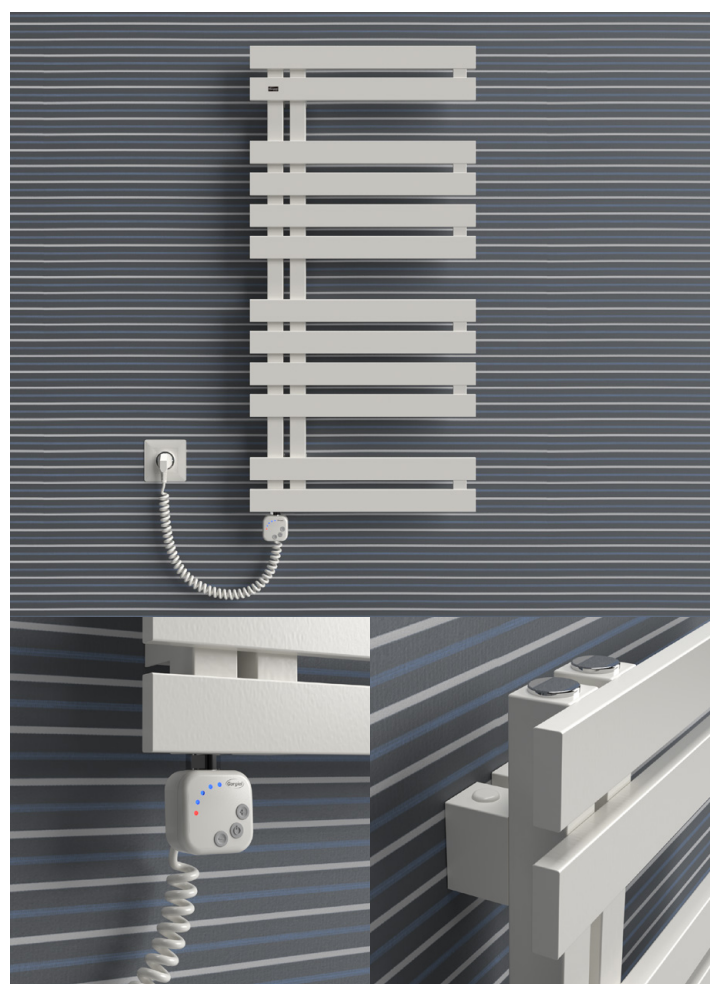


As standard supplied in white with the electric heater connected in position 01 [see connection diagram]

Type:	ACRe - electric dryer
Material:	Low carbon steel, unalloyed
Construction:	Pipe profile 50 x 15 Collector 35 x 35
Surface finish:	Standard color is white [01]

ELECTRIC HEATER

Power:	230 VAC, 50 Hz
Housing protection degree:	IPx 4
Heater connection	½"


	STANDARD
Connection diagram	[E] 
Connection codes	

2 - air vent ½"
3 - plug ½"

FUNCTIONS OF THE ELECTRIC HEATER


1. The temperature of the heating medium is regulated by means of the "+" and "-" buttons. Heating levels: 30, 40, 50, 60°C.
2. Dryer function with maximum heating power with two operating modes:
 - Timer "2h back" - after 2 hours return to the previous settings,
 - "2h off" timer - the heater is turned off after 2 hours.
3. The controller can be rotated by an angle of 330°.
4. Intelligent work control - microprocessor control.
5. Intelligent visualization of operating states: heating, setting, timer, failure - colorful LED technology.
6. Protection against freezing of the refrigerant - Antifreeze function.
7. Two-stage thermal protection:
 - The main controller does not allow the temperature to rise above 60 ° C,
 - The thermal fuse cuts off the power at the moment of uncontrolled rise

CREST e ELEKTRICZNY	Height		Width	Depth	Heater	INDEKS	Version CODE
	H [mm]	Hg [mm]	W [mm]	D [mm]	[W]		
ACRe 80/50	890	820	500	90	400	1E115143270101	
ACRe 100/50	1100	1030	500	90	400	1E115143280101	
ACRe 140/50	1450	1380	500	90	500	1E115143290101	

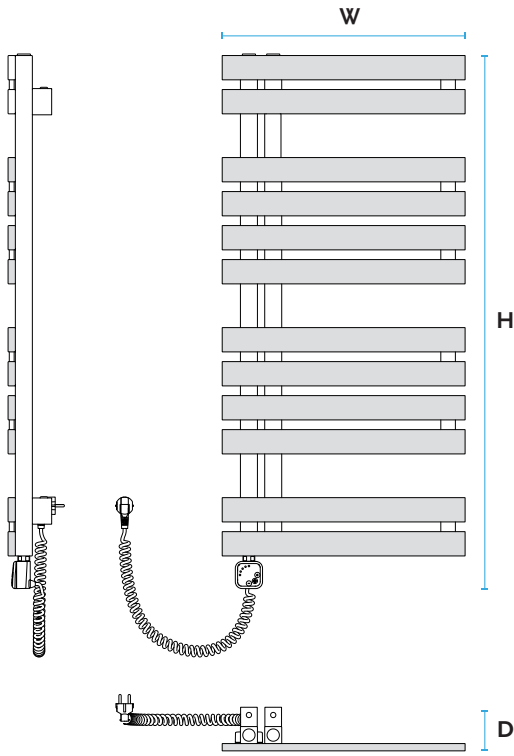


The heater construction

1. Heating element
2. Controller housing
3. Switch (on / off)
4. Downward temperature control
5. Temperature control "up"
6. LED indicator
7. Power cord

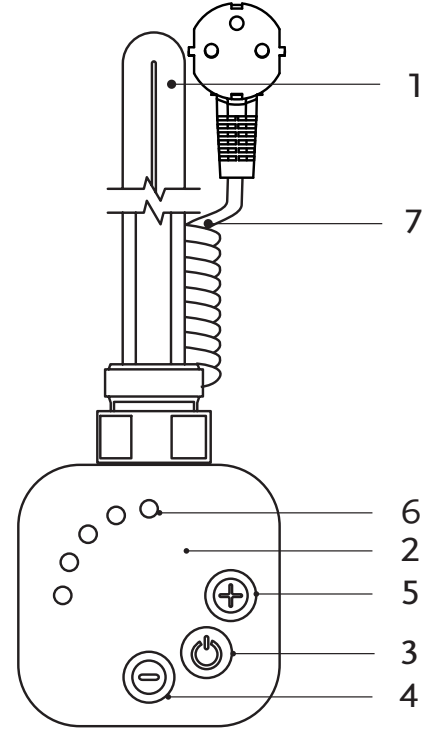

H - total height; Hg - radiator height; W - width; D - depth;

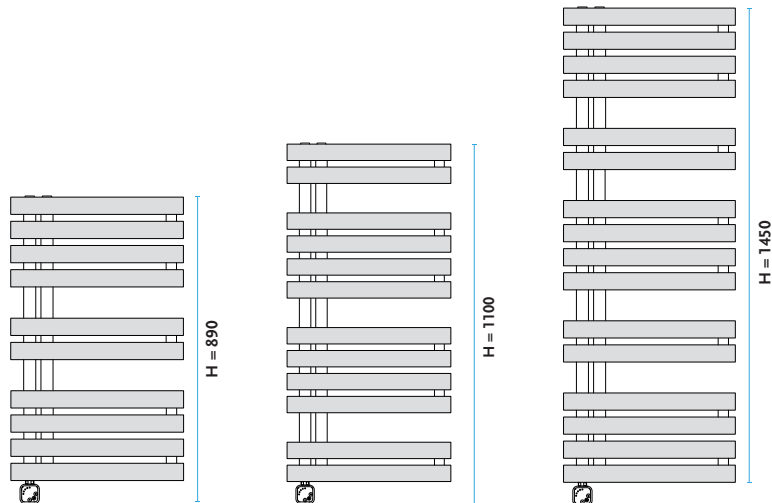



GORGIEL GROUP Sp. zo.o. Sp.k.

Karpicko, 64-200 Wolsztyn
ul. Poznańska 10

tel. +48 68 347 54 00
fax + 48 68 347 54 50
gorgiel@gorgiel.com.pl



gorgiel.pl