


AK-DR



Type:	AK-DR - vertical radiator
Material:	low carbon steel
Construction:	collector profile D 40 x 30 pipe \varnothing 20
Work pressure:	up to 1,0 MPa
Work temperature:	up to 95°C
Standard equipment:	plug 1/2", air vent 1/2" radiator bracket type Z 11
Finishing:	Standard colour white [01]
Threads:	1/2" Gw
Connection:	STANDARD [11]

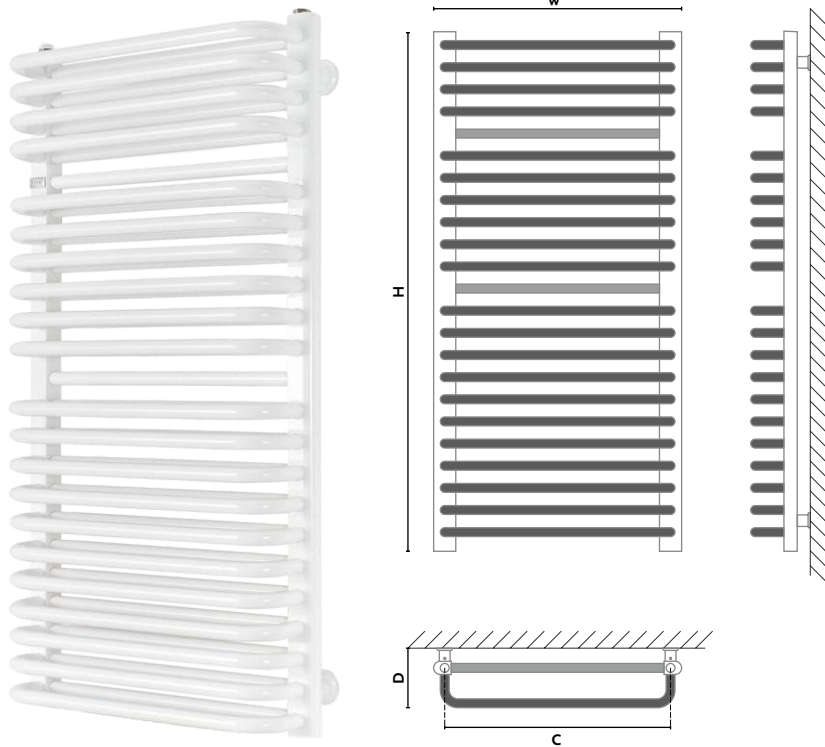

AK-DR	H [mm]	W [mm]	C [mm]	D [mm]	n	55/45/20°C [W]	75/65/20°C [W]	INDEX
AK-DR 74/40	740	400	350	165	1,2491	246	465	1011111375 1101
AK-DR 94/40	940	400	350	165	1,2428	319	601	1011111376 1101
AK-DR 118/40	1180	400	350	165	1,2353	406	764	1011111377 1101
AK-DR 134/40	1340	400	350	165	1,2303	466	873	1011111378 1101
AK-DR 150/40	1500	400	350	165	1,2253	524	980	1011111379 1101
AK-DR 74/50	740	500	450	165	1,2591	301	572	1011111380 1101
AK-DR 94/50	940	500	450	165	1,2528	390	740	1011111381 1101
AK-DR 118/50	1180	500	450	165	1,2452	498	941	1011111382 1101
AK-DR 134/50	1340	500	450	165	1,2401	556	1047	1011111383 1101
AK-DR 150/50	1500	500	450	165	1,2351	642	1207	1011111384 1101

